

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2000 (28.12.2000)


PCT

(10) International Publication Number
WO 00/79821 A1

- (51) International Patent Classification⁷: **H04Q 7/34, H04B 17/02**
- (21) International Application Number: **PCT/US00/17754**
- (22) International Filing Date: **22 June 2000 (22.06.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/339,152 24 June 1999 (24.06.1999) US
- (71) Applicant: **QUALCOMM INCORPORATED [US/US];**
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (72) Inventor: **BAKER, Kenneth, R.; 4753 Kirkwood Street,**
Boulder, CO 80301 (US).
- (74) Agents: **OGROD, Gregory, D. et al.; Qualcomm Incorporated,**
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (81) Designated States (*national*): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (*regional*): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:**
— With international search report.

[Continued on next page]

(54) Title: **METHOD AND SYSTEM FOR MONITORING TRAFFIC ON A CODE DIVISION MULTIPLE ACCESS REPEATER**

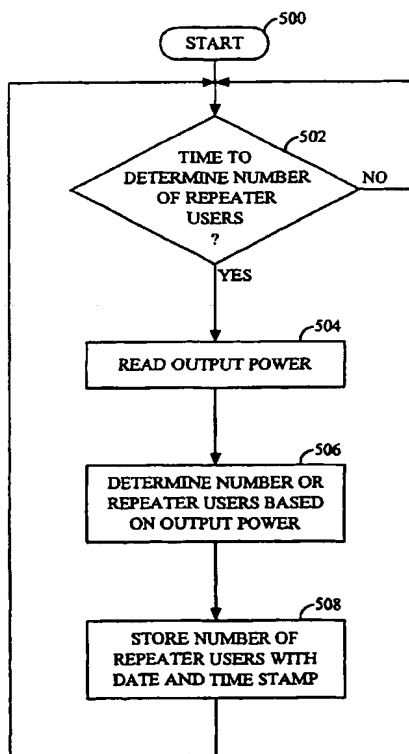

(57) Abstract: The system monitors traffic on a CDMA repeater. The system receives a metric related to the operation of the CDMA repeater and automatically determines the amount of call traffic on the CDMA repeater based on the metric. The metric related to operation of the CDMA repeater could be the signal power from the CDMA repeater. The amount of the call traffic on the CDMA repeater could be measured by determining the number of users on the CDMA repeater. The number of users could be determined from a formula where the signal output is proportional to the number of users on the CDMA repeater. The system may also store or transmit to a remote location the metric or the amount of call traffic on the CDMA repeater.

WO 00/79821 A1

WO 00/79821 A1



— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD AND SYSTEM FOR MONITORING TRAFFIC ON A CODE DIVISION MULTIPLE ACCESS REPEATER

5 BACKGROUND OF THE INVENTION

I. Field of the Invention

10 The present invention relates to the field of communications. More particularly, the present invention relates to a novel and improved method and system for monitoring traffic on a Code Division Multiple Access (CDMA) repeater.

15 II. Description of the Related Art

Wireless communication entails the transmission of electromagnetic waves through free space. In a wireless communication system, a base station exchanges wireless signals with a communication device, such as a mobile phone. A network of base stations provides wireless communication service to an expansive coverage area. Due to various geographic and economic constraints, the network of base stations does not provide communication services in certain areas within the coverage area. These holes in the coverage area are filled with the use of repeaters. Repeaters receive, amplify, and re-transmit signals to and from the communication device and base station. Typically, the repeater is a high gain bi-directional amplifier. The repeater provides communication service to the coverage hole, which was previously not serviced by the base station. Repeaters may also augment the coverage area of a sector by shifting the location of the coverage area or altering the shape of the coverage area. Repeaters play an integral role in providing wireless communication.

30 Monitoring call traffic is a key component in providing wireless communication. The amount of call traffic determines whether certain coverage areas need to upgrade or downgrade their communication equipment. High call volume over a repeater may signify the need to replace the repeater with a base station to better handle a large volume of traffic. However, there are no current solutions to automatically monitor the amount of traffic coming through the CDMA repeater in an accurate and efficient manner. CDMA base stations can monitor the amount of traffic on the base station through base station software. However, the base station software does

not distinguish between calls coming in directly from the mobile phone and calls coming in from the repeater.

SUMMARY OF THE INVENTION

5

The present invention is a novel and improved system that solves the above problem by monitoring traffic on a CDMA repeater. The invention receives a metric related to CDMA repeater operations and determines the amount of call traffic on the CDMA repeater based upon the metric. Obtaining
10 the traffic on the CDMA repeater provides a distinct advantage in network planning and architecture. Determining that the traffic over the CDMA repeater is too heavy would indicate the need to replace the CDMA repeater with the base station to provide better wireless communication service.

In one embodiment, the invention monitors the amount of the call traffic
15 based on signal power of the CDMA repeater. A power meter reads the signal power of the CDMA repeater. The invention receives the signal power of the CDMA repeater from the power meter. The invention then determines the number of users on the CDMA repeater based on the signal power from the power meter. This determination is made by a formula where the signal power
20 is proportional to the number of users on a CDMA repeater. The repeater measurement system may store the number of repeater users in memory or transmit the number of repeater users to a remote location.

BRIEF DESCRIPTION OF THE DRAWINGS

25

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

30

FIG. 1 is a block diagram of a CDMA communication system in an example of the invention;

FIG. 2 is a block diagram of a CDMA communication system in an embodiment of the invention;

35

FIG. 3 is a block diagram of a repeater measurement system in an embodiment of the invention;

FIG. 4 illustrates a graph of the number of users on a repeater vs. the signal output power for a noisy repeater with a total link gain of -10dB, 0dB, and 10dB in an embodiment of the invention; and

FIG. 5 is a flow chart of the repeater measurement system in an embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

CDMA Communication System – FIG. 1

FIG. 1 depicts a CDMA repeater system 102 in accord with the present invention. The CDMA repeater system 102 is comprised of a receiver 104, an amplifier 106, a transmitter 108, a monitoring system 110, an output link 121, a repeater measurement system 120, and an output link 122. The input CDMA signals 112 from user devices 101 are received by the receiver 104. The receiver 104 is connected to the amplifier 106. The amplifier 106 is connected to the transmitter 108. The transmitter 108 transmits the output CDMA signals 114 to a base station 103. In various alternative embodiments, the monitoring system 110 could be connected to the receiver 104, the amplifier 106, and/or the transmitter 108. The repeater measurement system 120 is connected to the monitoring system 110 by the output link 121 and to the output link 122. Those skilled in the art are aware that there are numerous other components and configurations that could be used for the repeater system of the present invention and that the invention is not restricted to the component and configurations depicted on FIG. 1. For example, repeaters typically include a communication path from base station 103 to user devices 101 that is omitted from FIG. 1.

In operation, the receiver 104 receives the input CDMA signals 112 and transfers the CDMA signals to the amplifier 106. The amplifier 106 receives the CDMA signals from the receiver 104, amplifies the CDMA signals, and transmits the amplified CDMA signals to the transmitter 108. The transmitter 108 receives the amplified CDMA signals from the amplifier 106 and transmits the amplified CDMA signals 114 to the base station 103. The monitoring system 110 can measure a metric from the receiver 104, the amplifier 106, and/or the transmitter 108. The monitoring system 110 then transmits the metric to the repeater measurement system 120 over the output link 121. An example of the monitoring system 110 is a power meter. The repeater measurement system 120 receives the metric from the monitoring system 110 and determines the amount of the call traffic on the CDMA repeater system 102 based on the metric.

The repeater measurement system could be co-located with the CDMA repeater (elements 104, 106, 108, and 110) or could be remotely located. The repeater measurement system 120 can transmit the amount of the call traffic

over the output link 122. An example of the repeater measurement system 120 is a personal computer configured with software to support the invention.

In another embodiment of the invention, the repeater measurement system 120 receives the metric from the monitoring system 110 and determines a current power level indicative of the amount of call traffic on the CDMA repeater system 102 based on the metric. Additionally, the repeater measurement system 120 may determine whether the current power level exceeds a predetermined power level and transmit a signal in response to a positive determination that the current power level exceeds the predetermined power level. Alternatively, the repeater measurement system 120 may store in a memory the current power level.

CDMA Repeater System – FIGS. 2-3

FIG. 2 depicts a CDMA repeater system 202 in one embodiment of the invention. The CDMA repeater system 202 is comprised of a CDMA repeater 210, a power monitoring system 240, and a repeater measurement system 250. The CDMA repeater 210 is comprised of a server antenna 204, a server antenna link 230, a duplexer 212, an input link 232, a low noise amplifier 220, an intermediate link 234, a power amplifier 222, an output link 236, a duplexer 218, a donor antenna link 238, a donor antenna 206, a low noise amplifier 216 and a power amplifier 214. The server antenna 204 is connected to the duplexer 212 by the server antenna link 230. The duplexer 212 is connected to the low noise amplifier 220 by the input link 232. The low noise amplifier 220 is connected to the power amplifier 222 by the intermediate link 234. The power amplifier 222 is connected to the duplexer 218 by the output link 236. The duplexer 218 is connected to the donor antenna 206 by the donor antenna link 238. The duplexer 218 is connected to the low noise amplifier 216. The low noise amplifier 216 is connected to the power amplifier 214. The power amplifier 214 is connected to the duplexer 212. The power monitoring system 240 is comprised of a power meter 242 and an analog/digital converter 244. The power meter 242 is connected to the output link 236 and the analog/digital converter 244. The analog/digital converter 244 is connected to the repeater measurement system 250 by output link 246. The antennas, duplexers, amplifiers, power meter, and analog/digital converter are conventional components, although they have not been combined to operate in accord with the invention.

In the forward operation, the donor antenna 206 receives a wireless CDMA signal from a base station. The donor antenna 206 transmits the received CDMA signal to the duplexer 218 through the donor antenna link 238.

The duplexer 218 receives the CDMA signal and transmits the CDMA signal to the low noise amplifier 216. The low noise amplifier amplifies the CDMA signal from the duplexer 218 and transmits the CDMA signal to the power amplifier 214. The power amplifier 214 amplifies the CDMA signal from the low noise amplifier and transmits the CDMA signal to the duplexer 212. The duplexer 212 receives the CDMA signal and transmits the CDMA signal to the server antenna 204 through the server antenna link 230. The server antenna 204 receives the CDMA signal from the duplexer 212 and transmits a wireless CDMA signal to a communication device such as a mobile phone.

In the reverse operation, the server antenna 204 receives a wireless CDMA signal from a communication device such as a mobile phone. The server antenna 204 transmits the received CDMA signal to the duplexer 212 through the server antenna link 230. The duplexer 212 receives the received CDMA signal and transmits the received CDMA signal to the low noise amplifier 220 through the input link 232. The low noise amplifier 220 amplifies the CDMA signal from the duplexer 212 and transmits the CDMA signal to the power amplifier 222 through the intermediate link 234. The power amplifier 222 amplifies the CDMA signal and transmits the CDMA signal to the duplexer 218 through the output link 236. The duplexer 218 receives the CDMA signal from the power amplifier 222 and transmits the CDMA signal to the donor antenna 206 through the donor antenna link 238. The donor antenna 206 receives the CDMA signal from the duplexer 218 and transmits a wireless CDMA signal to the base station. This reverse operation comprises the reverse link of the CDMA repeater for communication from the mobile phone to the base station.

In this embodiment, the number of users on a CDMA repeater is calculated from the reverse operation of the CDMA repeater. The power meter 242 measures the output power over the output link 236. Other embodiments may measure the power from the CDMA repeater from the input link 232 and/or the intermediate link 234. The power from the CDMA repeater may also be measured from the server antenna link 230 or the donor antenna link 238 with the use of a filter. The power meter 242 then transmits the output power to an analog/digital converter 244. The analog/digital converter 244 receives the output power in analog form from the power meter 244 and converts the output power to digital form. The analog/digital converter 244 then transmits a metric signal over output link 246 indicating the output power in digital form to the repeater measurement system 250. In other embodiments the analog/digital converter may be included within the power meter 244 or the repeater measurement system 250. The repeater measurement system 250

then determines the number of users on the CDMA repeater 210 as described in FIG. 3.

FIG. 3 depicts the repeater measurement system 250. The repeater measurement system 250 is comprised of a memory 302, a processor 304, and a communication device 306. The processor 304 is connected to the output link 246, the memory 302 and a communication device 306. The memory 302 is a computer-readable medium that stores computer-executable instructions 308 and data 310.

The term "processor" could mean a single processing device or a plurality of inter-operational processing devices. Some examples of processors are computers, microprocessor chips, integrated circuits, and logic circuitry. The memory 302 is any conventional storage system that stores instructions 308 and data 310 for the processor 304. The communication device 306 is any communication device that transmits data for the processor 304.

In operation, the processor 304 executes instructions 308 stored in the memory 302 to determine the number of users on the CDMA repeater based on the digital signal representing the output power from the output link 246. The instructions 308 incorporate the following calculations.

In this embodiment, the output power can be shown by the equation 1.

$$S_o = (m_R \cdot \frac{q_R}{G_T} \cdot (1 + i) \cdot N_o \cdot W + k \cdot T_R \cdot W) G_R \quad [1]$$

where S_o = the signal output of a noisy repeater;

W = bandwidth of the CDMA signal;

m_R = number of full rate users of the radio channel of the repeater;

i = number of users heard at the repeater that are in other sectors;

G_R = gain of the repeater;

G_T = total link gain;

k = Boltzman's constant;

T_R = the excess noise temperature of the repeater

where:

$$T_R = T_o (Fr - 1) \quad [2]$$

where T_o = the system noise temperature; and

Fr = the noise factor of the repeater = $10^{Nf_R / 10}$

7

where Nf_r = the noise figure of the repeater in dB;
 $N_o = kT_o$ = thermal noise density; and
 q_r = normalized signal power at the BTS for a single user
 where:

$$q_r = \frac{(1+j)}{\frac{W}{\frac{R}{E_b} - m_r(1+i)}} \quad [3]$$

5

where $j = N_j/N_o$ = the normalized noise density of any jamming signals;

N_j = power density of any jammers impinging upon the sector receiver;

10 E_b/N_o = bit energy to noise density level. This ratio is an average value per user ; and

R = bit rate.

15 The number of full rate users of the repeater channel, m_r , can then be determined from Equation 1 as shown in Equation 4.

$$m_r = \frac{\frac{W}{G_T \cdot \frac{R}{E_b} [S_o - k \cdot T_R \cdot W \cdot G_R]}}{(1+j)(1+i) \cdot N_o \cdot W \cdot G_R + G_T(1+i)[S_o - k \cdot T_R \cdot W \cdot G_R]} \quad [4]$$

20 In Equation 4, the total link gain G_T can be determined after the repeater is installed by totaling the gain of the repeater, the gain of the donor antenna on the repeater, the path loss between the repeater and the base station, and the gain of the base station antenna. The total link gain G_T chosen at the time of installation is the operating point for the repeater. In this embodiment, the network engineer chooses an operating point such that the output signal power is proportional to the number of users on the repeater.

25 FIG. 4 illustrate graphs for the number of repeater users vs. the output signal power for a noisy repeater for three different total link gains G_T of -10dB, 0dB, and 10dB. Repeaters are not noiseless devices. Thus, the noisy repeaters contribute noise to the signals that the repeater amplifies. The noisy repeater with a total link gain G_T of -10dB is shown by the line 401. The noisy repeater with a total link gain G_T of 0dB is shown by the line 402. The noisy repeater
 30 with a total link gain G_T of 10dB is shown by the line 403. FIG. 4 shows that

when the total link gain G_T is less than 1dB, the signal output power will increase proportionally to the number of users on a repeater. A total link gain G_T needs to be chosen so that the signal output power will increase proportionally to the number of users on a repeater in this embodiment. The total link gain G_T varies depending upon the installation of the repeater. The total link gain G_T should be preferably less than 0dB so that the signal power output will increase proportionally to the number of users on the repeater.

The bandwidth of the CDMA signal W is a constant. An example of a bandwidth of the CDMA signal is 1.228 MHz. The bit rate R is also a constant. An example of a bit rate is 14.4kbs. One skilled in the art may assume the bit energy to noise density ratio E_b/N_0 based on the typical performance for the coverage area. Alternatively, the bit energy to noise density ratio E_b/N_0 can be obtained from the most recent average value from the base station or mobile switching center software.

The excess noise temperature of the repeater T_R can be derived from the the system noise temperature T_0 and the noise factor of the repeater F_r . One skilled in the art can assume the system noise temperature, T_0 , such as 290K. The noise factor of the repeater F_r can be derived from the noise figure of the repeater Nf_r which can be measured after installation. The normalized noise density of any jamming signals j can be assumed by accounting for any jamming signals. The proportion of users i heard at the repeater that are in other sectors can also be assumed. This assumption may be based on the geographic territory and density of population near the sector.

The number of users, m_R , is expressed in terms of full rate users. Full rate users are users whose bit rate for human conversation through CDMA devices is not reduced due to gaps of silence in conversation. On the other hand, variable rate users are users whose bit rate for human conversation through CDMA devices is reduced due to voice coding to take advantage of gaps of silence in conversation. The number of full rate users can be used to calculate the number of variable rate user as shown in Equation 5.

$$n = \frac{m_R}{v} \quad [5]$$

where n = number of variable rate users of the repeater;

m_R = the number of full rate users of the repeater; and

v = the voice activity factor.

The voice activity factor, v , for natural human conversation typically is 35%-40%.

Flow Chart of Repeater Measurement System – FIG. 5

FIG. 5 depicts a flow chart illustrating the processor 304 operation when the instructions 308 stored in the memory 302 are executed. The process begins at step 500. At step 502, the processor 304 checks if the current time is a time to determine the number of repeater users. For example, time intervals can be set for every five minutes or every hour depending on how frequent the network engineer would like to monitor traffic over the repeater. If the current time does not match the time to determine, the processor 304 repeats step 502 until the current time does match. If the current time is a time to determine the number of repeater users, the processor 304 continues to step 504. At step 504, the processor 304 reads the metric signal from output link 246 indicating the signal output power in digital form from the power monitoring system 240. At step 506, the processor 304 then determines the number of users on the repeater 210 using Equation 4, as discussed above in FIG. 3, based on the metric signal from output link 246. At step 508, the processor 304 stores the number of users on the repeater 210 in the memory 302 with a date and time stamp. This information can be automatically provided or retrieved using the communication device 306. The processor 304 then returns to step 502 for the next time interval to determine the number of users.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

I CLAIM:

CLAIMS

1. A method for monitoring call traffic on a Code Division Multiple
2 Access (CDMA) repeater, the method comprising:
receiving a metric related to an operation of the CDMA repeater; and
4 automatically determining an amount of call traffic on the CDMA
repeater based on the metric.
2. The method of claim 1 wherein determining the amount of call
2 traffic on the CDMA repeater further comprises determining a number of users
on the CDMA repeater.
3. The method of claim 2 wherein the metric is proportional to the
2 number of users on the CDMA repeater.
4. The method of claim 2 wherein the metric is a power signal from
2 a reverse link the CDMA repeater.
5. The method of claim 2 further comprising storing in a memory
2 the number of users on the CDMA repeater.
6. The method of claim 2 further comprising transmitting to a
2 remote location the number of users on the CDMA repeater.
7. The method of claim 2 wherein the users are full rate users on the
2 CDMA repeater.
8. The method of claim 2 wherein the users are variable rate users
2 on the CDMA repeater.
9. The method of claim 1 further comprising storing in a memory
2 the amount of the call traffic on the CDMA repeater.
10. The method of claim 1 further comprising transmitting to a
2 remote location the amount of the call traffic on the CDMA repeater.

11. The method of claim 1 wherein automatically determining the
2 amount of call traffic on the CDMA repeater is further based on a gain of the
CDMA repeater.

12. The method of claim 11 wherein automatically determining the
2 amount of call traffic on the CDMA repeater is further based on a total link
gain.

13. The method of claim 12 wherein automatically determining the
2 amount of call traffic on the CDMA repeater is further based on a normalized
signal power at a base station for a single user, a thermal noise density, and a
4 bandwidth of a CDMA signal.

14. The method of claim 13 wherein the normalized signal power at
2 the base station for the single user is determined from a normalized noise
density of any jamming signal, a bit energy to noise density level, a bit rate, and
4 a proportion of users heard at the CDMA repeater in other sectors.

15. The method of claim 14 wherein automatically determining the
2 amount of call traffic on the CDMA repeater is further based on the proportion
of users heard at the CDMA repeater in other sectors.

16. The method of claim 15 wherein automatically determining the
2 amount of call traffic on the CDMA repeater is further based on a Boltzman's
Constant, the bandwidth of the CDMA signal, and the excess noise temperature
4 of the CDMA repeater.

17. A method for monitoring call traffic on a Code Division Multiple
2 Access (CDMA) repeater, the method comprising:
receiving a metric related to an operation of the CDMA repeater; and
4 automatically determining a current power level indicative of an amount
of call traffic on the CDMA repeater based on the metric.

18. The method of claim 17 further comprising:
2 determining whether the current power level exceeds a predetermined
power level; and
4 transmitting a signal in response to a positive determination that the
current power level exceeds the predetermined power level.

2 19. The method of claim 17 further comprising storing in a memory the
current power level.

2 20. A computer-readable medium having computer-executable
instructions for performing a method for monitoring traffic on a CDMA device,
the method comprising:
4 receiving a metric related to an operation of the CDMA device; and
automatically determining an amount of call traffic on the CDMA device
6 based on the metric.

2 21. The computer-readable medium of claim 20 wherein determining
the amount of call traffic on the CDMA device further comprises determining a
number of users on the CDMA repeater.

2 22. The computer-readable medium of claim 21 wherein the metric is
proportional to the number of users on the CDMA repeater.

2 23. The computer-readable medium of claim 22 wherein the metric is
a power signal from a reverse link of the CDMA repeater.

2 24. The computer-readable medium of claim 21 wherein the method
further comprises storing in a memory the number of users on the CDMA
repeater.

2 25. The computer-readable medium of claim 21 wherein the method
further comprises transmitting to a remote location the number of users on the
CDMA repeater.

2 26. The computer-readable medium of claim 21 wherein the users are
full rate users on the CDMA repeater.

2 27. The computer-readable medium of claim 21 wherein the users are
variable rate users on the CDMA repeater.

2 28. The computer-readable medium of claim 20 wherein the method
further comprises storing in a memory the amount of the call traffic on the
CDMA device.

29. The computer-readable medium of claim 20 wherein the method
2 further comprises transmitting to a remote location the amount of the call
traffic on the CDMA repeater.

30. The computer-readable medium of claim 20 wherein
2 automatically determining the amount of call traffic on the CDMA device is
further based on a gain of the repeater.

31. The computer-readable medium of claim 30 wherein
2 automatically determining the amount of call traffic on the CDMA device is
further based on a total link gain.

32. The computer-readable medium of claim 31 wherein
2 automatically determining the amount of call traffic on the CDMA device is
further based on a normalized signal power at a base station for a single user, a
4 thermal noise density, and a bandwidth of a CDMA signal.

33. The computer-readable medium of claim 32 wherein the
2 normalized signal power at the base station for the single user is determined
from a normalized noise density of any jamming signal, a bit energy to noise
4 density level, a bit rate, and a proportion of users heard at the CDMA device in
other sectors.

34. The computer-readable medium of claim 33 wherein
2 automatically determining the amount of call traffic on the CDMA device is
further based on the proportion of users heard at the CDMA device in other
4 sectors.

35. The computer-readable medium of claim 34 wherein
2 automatically determining the amount of call traffic on the CDMA device is
further based on a Boltzman's Constant, the bandwidth of the CDMA signal,
4 and the excess noise temperature of the CDMA device.

36. A computer-readable medium having computer-executable
2 instructions for performing a method for monitoring traffic on a CDMA device,
the method comprising:
4 receiving a metric related to an operation of the CDMA repeater; and
automatically determining a current power level indicative of an amount
6 of call traffic on the CDMA repeater based on the metric.

37. The computer-readable medium of claim 36 wherein the method
2 further comprises:
determining whether the current power level exceeds a predetermined
4 power level; and
transmitting a signal in response to a positive determination that the
6 current power level exceeds the predetermined power level.

38. The computer-readable medium of claim 36 wherein the method
2 further comprises storing in a memory the current power level.

39. A Code Division Multiple Access (CDMA) repeater system
2 comprising:
a receiver configured to receive CDMA signals and transmit CDMA
4 signals;
an amplifier configured to receive CDMA signals from the receiver,
6 amplify CDMA signals, and transmit CDMA signals;
a transmitter configured to receive CDMA signals from the amplifier
8 and transmit CDMA signals; and
a repeater measurement system configured to receive a metric related to
10 an operation of the CDMA repeater and to automatically determine an amount
of call traffic on the CDMA repeater based on the metric.

40. The CDMA repeater system of claim 39 wherein the repeater
2 measurement system configured to determine the amount of call traffic on the
CDMA repeater further comprises to determine the number of users on the
4 CDMA repeater.

41. The CDMA repeater system of claim 40 wherein the metric is
2 proportional to the number of users on the CDMA repeater.

42. The CDMA repeater system of claim 40 wherein the metric is a
2 power signal from a reverse link of the CDMA repeater.

43. The CDMA repeater system of claim 40 wherein the repeater
2 measurement system is further configured to store in a memory the number of
users on the CDMA repeater.

2 44. The CDMA repeater system of claim 40 wherein the repeater measurement system is further configured to transmit to a remote location the number of users on the CDMA repeater.

2 45. The CDMA repeater system of claim 40 wherein the users are full rate users on the CDMA repeater.

2 46. The CDMA repeater system of claim 40 wherein the users are variable rate users on the CDMA repeater.

2 47. The CDMA repeater system of claim 39 wherein the repeater measurement system is further configured to store in a memory the amount of the call traffic on the CDMA repeater.

2 48. The CDMA repeater system of claim 39 wherein the repeater measurement system is further configured to transmit to a remote location the amount of the call traffic on the CDMA repeater.

2 49. The CDMA repeater system of claim 39 wherein the repeater measurement system configured to automatically determine the amount of call traffic on the CDMA repeater is further based on a gain of the repeater.

2 50. The CDMA repeater system of claim 49 wherein the repeater measurement system configured to automatically determine the amount of call traffic on the CDMA repeater is further based on a total link gain.

2 51. The CDMA repeater system of claim 50 wherein the repeater measurement system configured to determine the amount of call traffic on the CDMA repeater is further based on a normalized signal power at a base station
4 for a single user, a thermal noise density, and a bandwidth of a CDMA signal.

2 52. The CDMA repeater system of claim 51 wherein the normalized signal power at the base station for the single user is determined from a normalized noise density of any jamming signal, a bit energy to noise density
4 level, a bit rate, and a proportion of users heard at the CDMA repeater in other sectors.

2 53. The CDMA repeater system of claim 52 wherein the repeater measurement system configured to determine the amount of call traffic on the

4 CDMA repeater is further based on the proportion of users heard at the CDMA
repeater in other sectors.

2 54. The CDMA repeater system of claim 53 wherein the repeater
measurement system configured to determine the amount of call traffic on the
4 CDMA repeater is further based on a Boltzman's Constant, the bandwidth of
the CDMA signal, and the excess noise temperature of the CDMA repeater.

2 55. A Code Division Multiple Access (CDMA) repeater system
comprising:
4 a receiver configured to receive CDMA signals and transmit CDMA
signals;
an amplifier configured to receive CDMA signals from the receiver,
6 amplify CDMA signals, and transmit CDMA signals;
a transmitter configured to receive CDMA signals from the amplifier
8 and transmit CDMA signals; and
a repeater measurement system configured to receive a metric related to
10 an operation of the CDMA repeater and automatically determine a current
power level indicative of an amount of call traffic on the CDMA repeater based
12 on the metric.

2 56. The CDMA repeater system of claim 55 wherein the repeater
measurement system is further configured to:
determine whether the current power level exceeds a predetermined
4 power level; and
transmit a signal in response to a positive determination that the current
6 power level exceeds the predetermined power level.

2 57. The CDMA repeater system of claim 55 wherein the repeater
measurement system is further configured to store in a memory the current
power level.

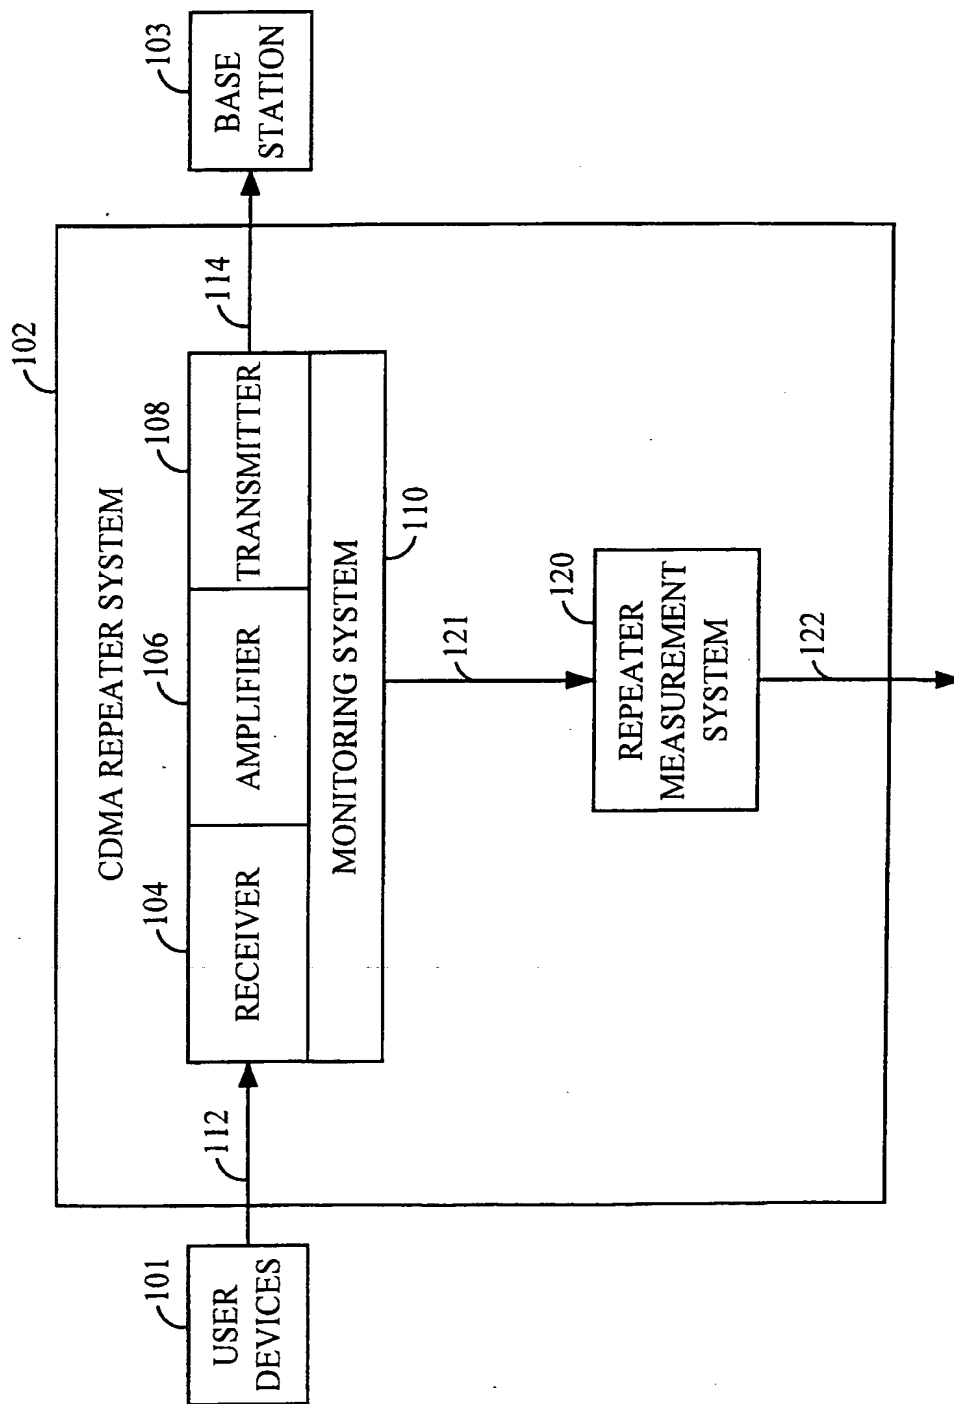


FIG. 1

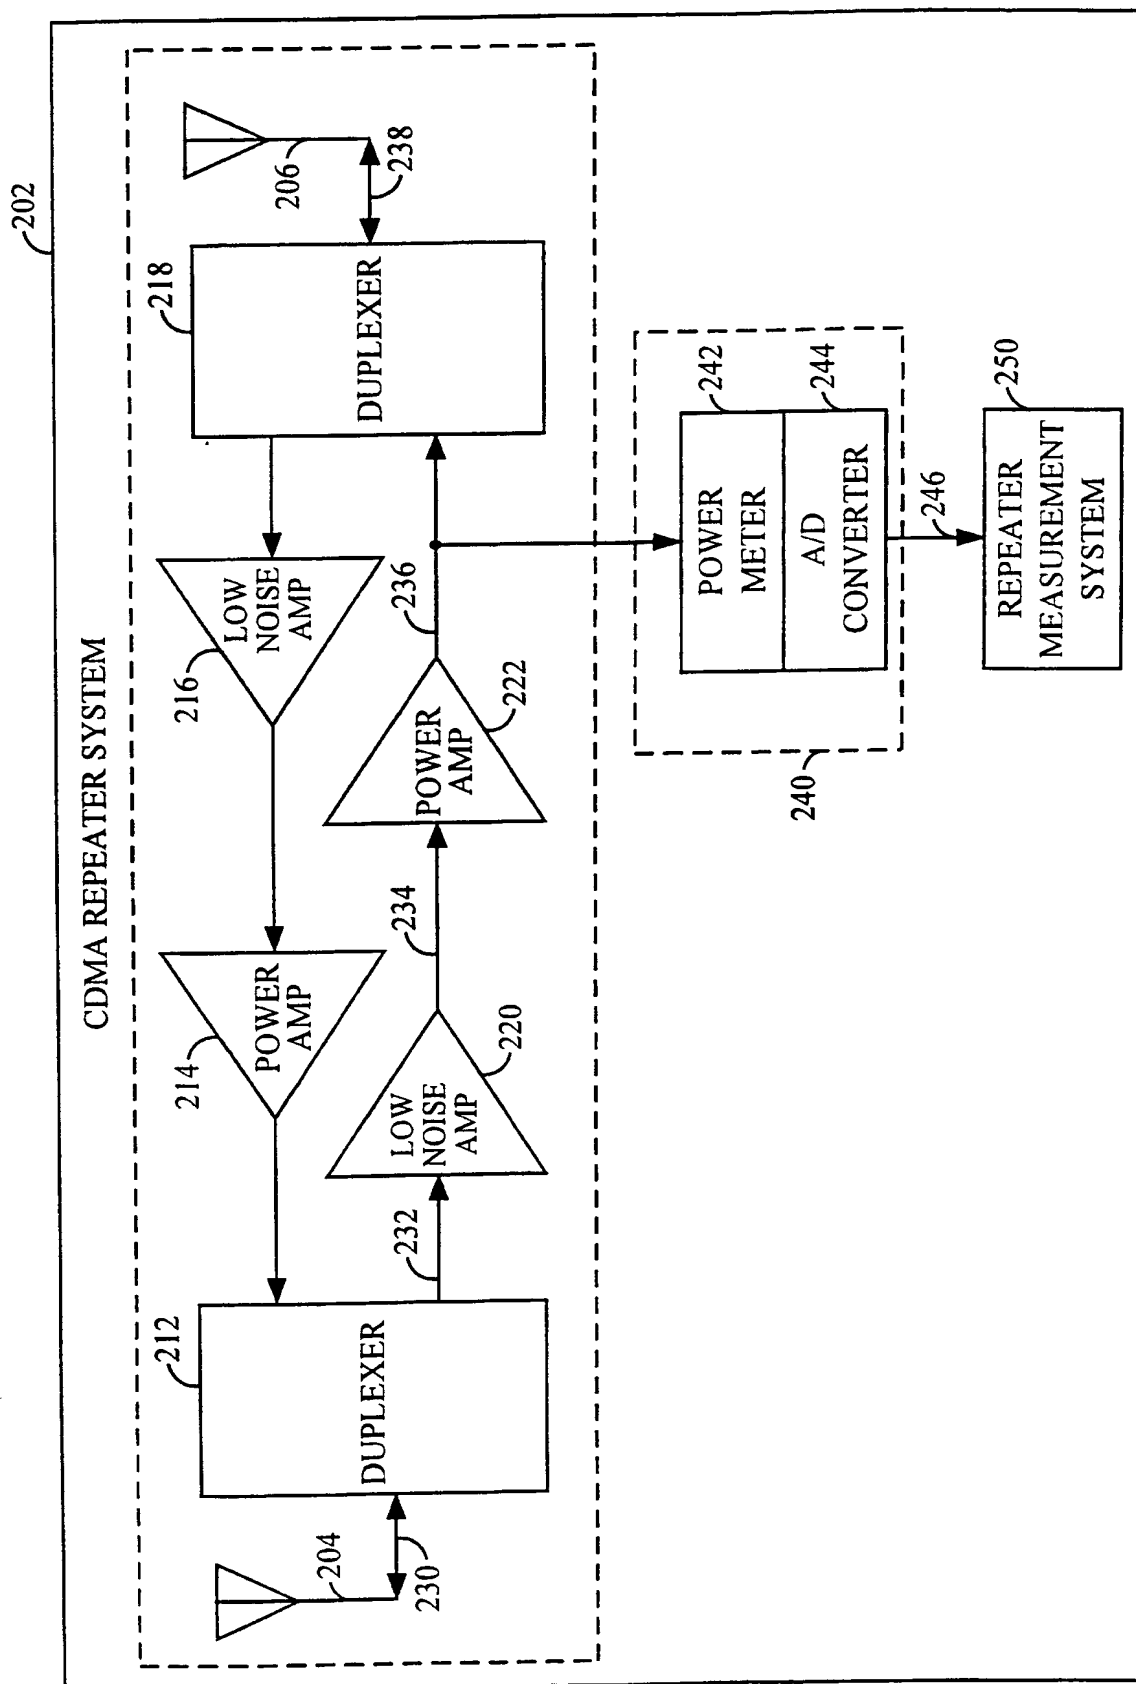


FIG. 2

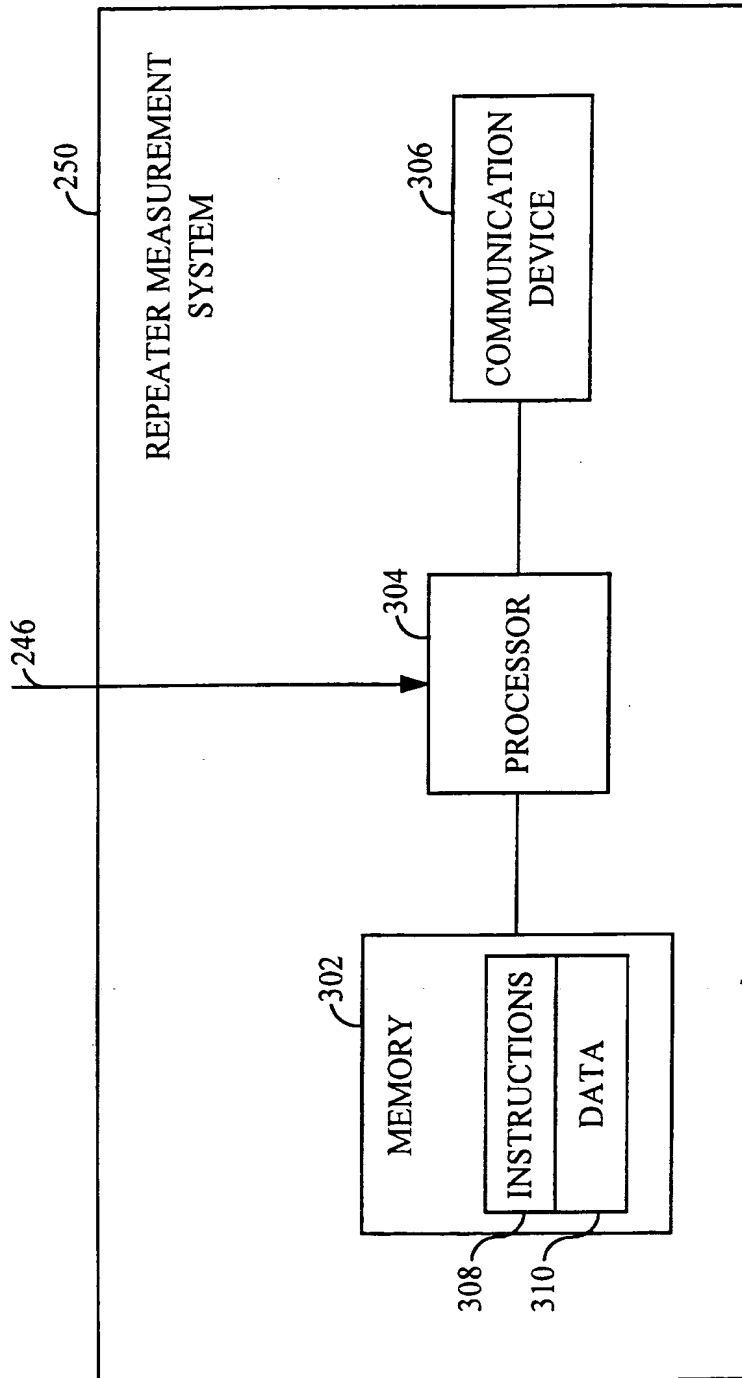


FIG. 3

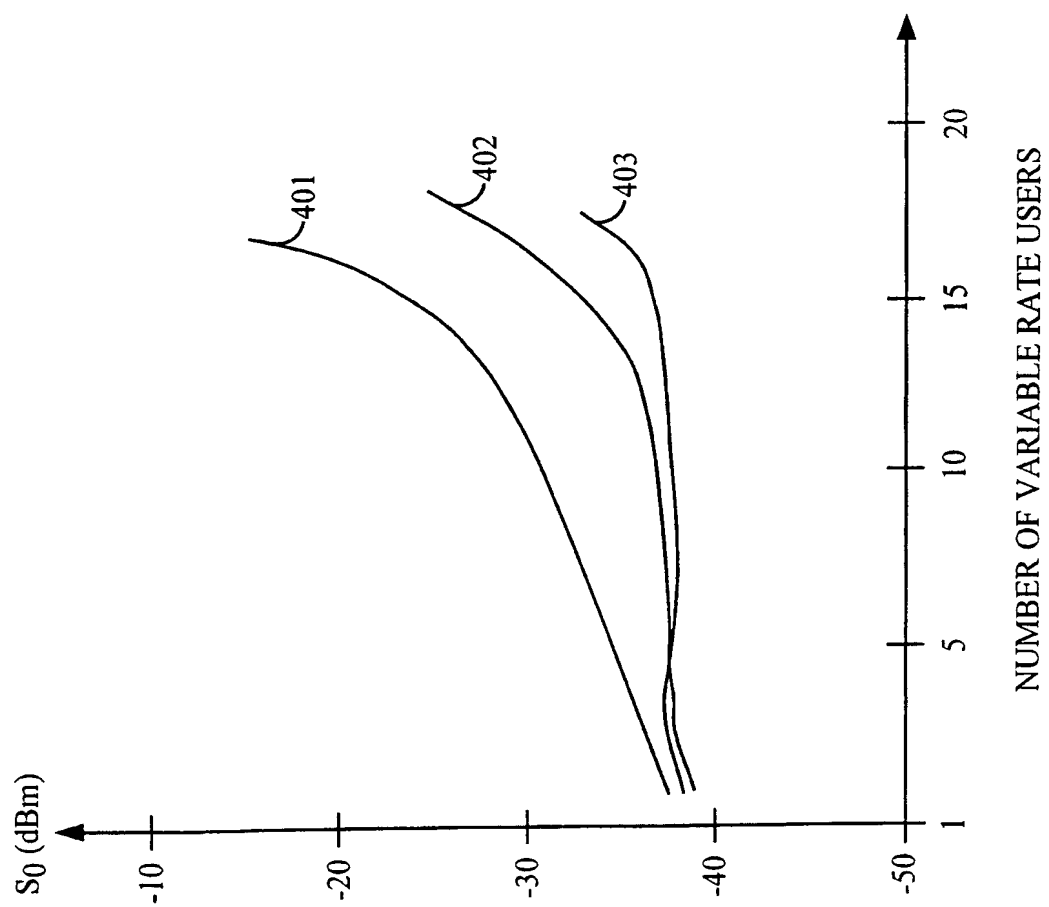


FIG. 4

5/5

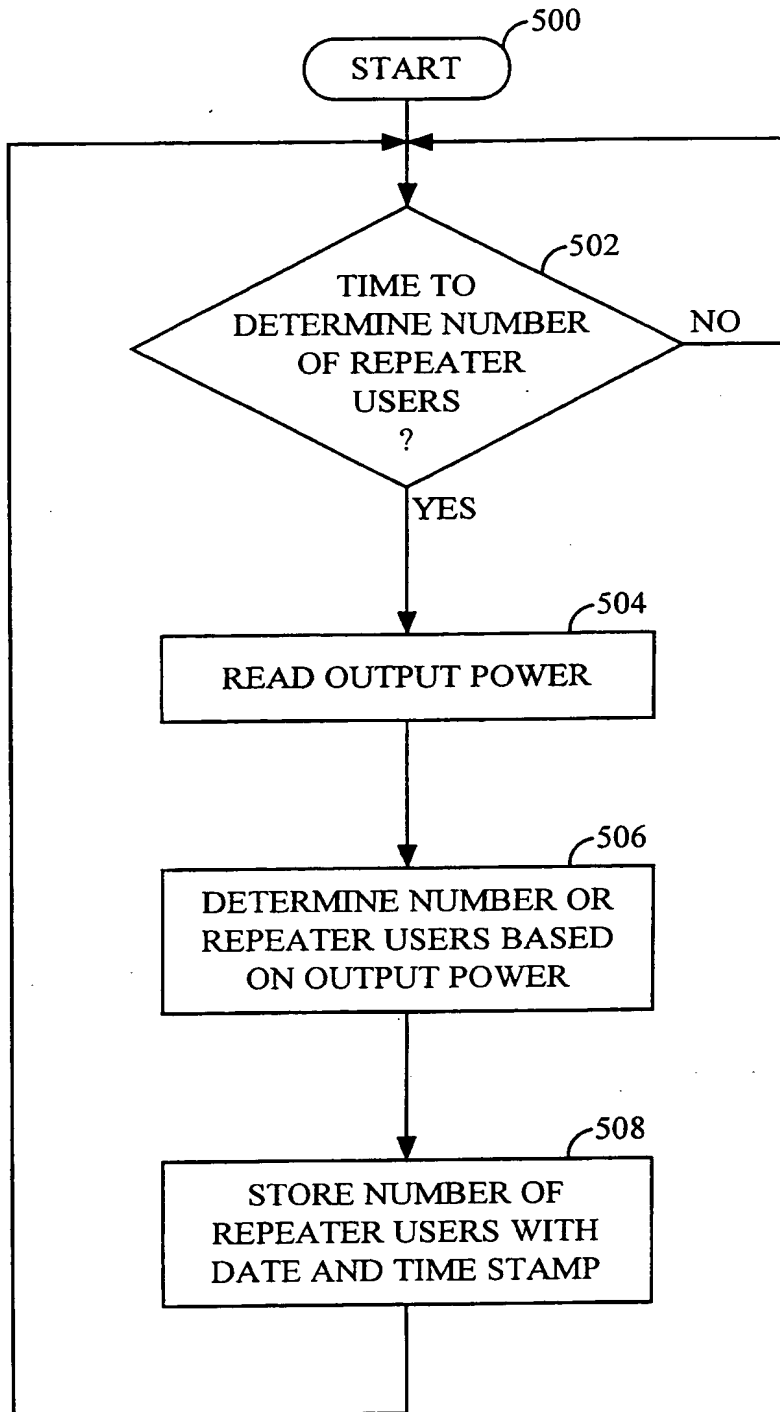


FIG. 5

INTERNATIONAL SEARCH REPORT

Int. .ional Application No
PCT/US 00/17754

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/34 H04B17/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 794 153 A (ARIYAVISITAKUL ET AL.) 11 August 1998 (1998-08-11) figure 3 column 3, line 16 - line 55 column 4, line 36 -column 5, line 10 column 6, line 53 -column 7, line 53 ---	1-4, 11-15, 17,20, 32,33, 39,55
Y	WO 97 33381 A (ALLGON AB.) 12 September 1997 (1997-09-12) abstract; claim 1 --- -/--	1-4, 11-15, 17,20, 32,33, 39,55

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

4 October 2000

Date of mailing of the international search report

20/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Danielidis, S

INTERNATIONAL SEARCH REPORT

Int. tional Application No

PCT/US 00/17754

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 44478 A (TELEFONAKTIEBOLAGET LM ERICSSON) 8 October 1998 (1998-10-08) abstract ---	1
A	US 5 859 838 A (SOLIMAN) 12 January 1999 (1999-01-12) abstract; figure 3 column 8, line 55 -column 9, line 12 ---	1
A	WO 96 03845 A (QUALCOMM INC.) 8 February 1996 (1996-02-08) page 13, line 35 -page 14, line 10 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/17754

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5794153	A	11-08-1998	NONE
WO 9733381	A	12-09-1997	SE 511385 C 20-09-1999 AU 711591 B 14-10-1999 AU 1949297 A 22-09-1997 BR 9707916 A 27-07-1999 CA 2244873 A 12-09-1997 CN 1212797 A 31-03-1999 DE 885491 T 07-10-1999 EP 0885491 A 23-12-1998 JP 2000506340 T 23-05-2000 NO 984034 A 29-10-1998 SE 9600842 A 05-09-1997 US 6009324 A 28-12-1999
WO 9844478	A	08-10-1998	FR 2761510 A 02-10-1998 EP 0938725 A 01-09-1999 JP 3020282 B 15-03-2000 JP 11513202 T 09-11-1999 US 6059624 A 09-05-2000
US 5859838	A	12-01-1999	AU 722746 B 10-08-2000 AU 3741297 A 20-02-1998 CN 1231809 A 13-10-1999 EP 0948869 A 13-10-1999 WO 9805129 A 05-02-1998
WO 9603845	A	08-02-1996	US 5548812 A 20-08-1996 AU 701240 B 21-01-1999 AU 3139395 A 22-02-1996 BR 9506274 A 12-08-1997 CA 2169646 A 08-02-1996 CN 1130975 A 11-09-1996 EP 0720808 A 10-07-1996 FI 961318 A 20-05-1996 IL 114667 A 24-09-1998 JP 9506230 T 17-06-1997 US 5722044 A 24-02-1998 ZA 9505809 A 18-04-1996